Fu DS-3V01/DS-3V02 HD-TVI Media Converter

Key features

- ตัวแปลงสัญญาณ fiber optic HDTVI
- Supports coaxial video control
- Auto identifies input video format
- รองรับสัญญาณได้ไกลถึง 20 KM.
- ไม่มีการดีเลย์ของสัญญาณ ความเสถียรสูง
- รองรับกล้อง 1080P 720P
- ทำให้ง่ายในการติดตั้ง

Typical Application

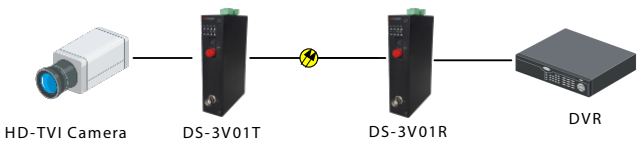

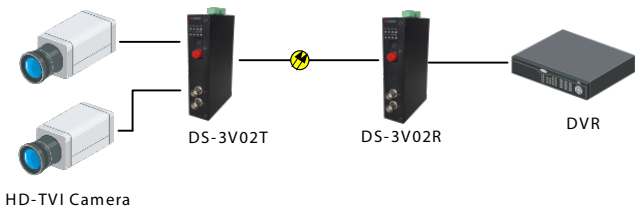

Specification

Parameter / Model	Fu DS-3V01	Fu DS-3V02
Physical Interface	FC Interface, single-mode and single-fiber	
Transmission Distance	0~20km	
Input/ Output Wavelength	Transmitter: 1310nm(Tx)/1550nm(Rx) Receiver: 1550nm(Tx)/1310nm(Rx)	
Transmitter Input Level	>500mVp-p	
Receiver Output Level	1Vp-p	
Input Auto Cable Equalization	1080p: 75-5 coaxial cable supports 300m 720p: 75-5 coaxial cable supports 500m	
Transmitter Input Reflection Loss	>15dB	
Input/output Impendence	75Ω/75Ω	
Physical Interface	BNC interface	
Input/output interfaces	1-ch	2-ch
Video Bandwidth	60MHz	
Sampling Size	10bit	
Indicators	Link, Power, Data, and Video	
Power	DC12V 1A	
Consumption	≤7W	
Working Humidity	10%~90%	
Working Temperature	-30°C~75°C	
Dimension	140 × 90 × 32 mm (5.5 × 3.5 × 1.3 inch)	
Installation Method	Industrial rail type	
Weight	0.4kg (0.88lb)	