


DS-2AE4562-A

Speed Dome Camera


Mini PTZ Dome Analog Camera

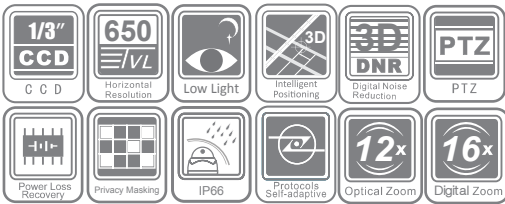

Key features

- 1/3" SONY Interline Transfer Exview HAD-II CCD
- ความละเอียด 650 TVL(PAL); 700 TVL(NTSC)
- ± 0.1° Preset Accuracy
- มองเห็นได้ในที่มืดสนิท 0 Lux minimum illumination
- หลอดแสงอินฟราเรดเทคโนโลยี EXIR, ระยะส่องแสงไกล 50m
- Optical Zoom 12x / Digital Zoom 16x
- อายุการใช้งานหลอดอินฟราเรด ยาวนาน 30,000 ชั่วโมง
- เชื่อมต่ออัตโนมัติ ด้วย protocol HIKVISION, Pelco-P/D
- รองรับ 3D intelligent positioning function
- Power-off memory function: หมุนกลับและซูมเลนส์ที่จุดล่าสุดก่อนไฟดับ
- มี sensor ตรวจจับอุณหภูมิภายในและแสดงค่าอุณหภูมิที่วัดได้
- ป้องกันการบุกรุกด้วยรหัสผ่าน
- สามารถตั้งพื้นที่ Zone Scanning ได้
- ป้องกันน้ำ กันฝุ่นด้วยมาตรฐาน IP66(outdoor)
- ป้องกันสัญญาณรบกวนด้วยระบบ 3D DNR

Dimensions

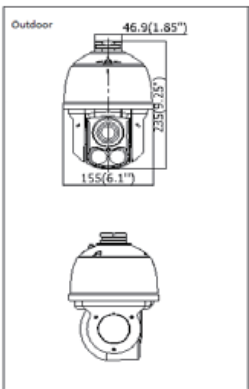

Accessories



DS-2AE4562-A			
Parameter/Model	DS-2AE4562-A Mini PTZ Dome Analog Camera		
Camera	Image Sensor	1/3" SONY Interline Transfer Exview HAD-II CCD	
	Effective Pixel	PAL:976(H)×582(V), NTSC:976(H)×494(V)	
	Horizontal Resolution	Color: 650 TVL , B/W: 700 TVL	
	Signal System	PAL /NTSC	
	Min. Illumination	Color: 0.1Lux/ (F1.6 AGC ON) B/W: 0.01Lux/(F1.6 AGC ON) 0 lux with IR	
	White Balance	Auto/ATW/Indoor/Outdoor/One push	
	AGC	Auto / Manual	
	S / N Ratio	≥ 50dB	
	3D DNR	High/Medium/Low/off	
	BLC	On / Off	
	Shutter Time	PAL: 1/1-1/10,000s NTSC: 1/1-1/10,000s	
	Day & Night	IR Cut Filter	
	Digital Zoom	16x	
	Privacy Mask	8 privacy masks programmable; a maximum of 8 zones can be masked simultaneously on the same video screen	
Focus Model	Auto / Semiautomatic / Manual		
Lens	Focal Length	3.8-45.6mm,12x	
	Zoom Speed	Approx.2s(Optical Wide-Tele)	
	Angle of View	50.69-4.5degree(Wide-Tele)	
	Min. Working Distance 10-1500mm(Wide-Tele)		
	Aperture Range	F1.6-F2.7	
	Pan and Tilt	Pan Range	360° endless
		Pan Speed	Pan Manual Speed: 0.1° -160°/s, Pan Preset Speed: 160°/s
		Tilt Range	-10°-90°(Auto Mirror)
		Tilt Speed	Tilt Manual Speed: 0.1°-120°/s, Tilt Preset Speed: 120°/s
		Proportional Zoom	Rotation speed can be adjusted automatically according to zoom multiples
Number of Preset		256	
Patrol		8 patrols, up to 32 presets per patrol	
Pattern		4 patterns, with the total recording time not less than 10 minutes	
Power-off Memory		Support	
Park Action		Preset / Patrol / Pattern / Pan scan / Tilt scan / Random scan / Frame scan / Panorama scan	
PTZ Position Display		On / Off	
Freeze Frame		Support	
Password Protection		Support	
Zone Scanning/Display		Scanning within programmed zone, display zone title	
Camera Title		Programmable title display	
Compass		Support, the north can be set	
Scheduled Task		Preset / Patrol / Pattern / Pan scan / Tilt scan / Random scan / Frame scan / Panorama scan	
IR		IR Range	50m
	IR irradiation angle	Automatically adjusted, depending on the zoom ratio	
Input/ Output	Monitor Output	1.0V(p-p) / 75Ω, NTSC (or PAL) composite, BNC	
General	Menu Language	English, Chinese	
	RS-485 Protocols	HIKVISION, Pelco-P, Pelco-D, self-adaptive	
	Power	24 VAC ;Outdoor: Max.20 W(IR: 4W, heater: 6W) ;Indoor: Max.14W(IR: 4W)	
	Working Temperature / Humidity	-30 °C-65°C(-22°F-149°F)(outdoor dome) / -10 °C-50°C(14°F-122°F) 90% or less	
	Protection Level	IP66 standard (outdoor dome) ,TVS 4,000V lightning protection, surge protection and voltage transient protection	
	Mounting	Various mounting modes optional	
	Dimension	Φ155×235mm (Φ6.10"×9.25")(Outdoor)	
	Weight (approx.)	2Kg (4.41lbs) (Outdoor)	
	Mount Option (only suitable for outdoor dome)	Long-arm wall mount: DS-1601Z; Long-arm pendant mount: DS-1662Z; Short-arm pendant mount: DS-1661Z;	