


# All IN ONE Fu 1524 4CH

# ALL IN ONE



## Key Features

- เครื่องบันทึกระบบ All In One รองรับกล้องได้สูงสุดจำนวน 4 กล้อง
- รองรับระบบ HDTVI , HDCVI , AHD , Analog , IP Camera
- ใช้สาย RG6 ในการรับ-ส่งสัญญาณภาพ , เสียง , Control
- ระบบบีบอัดข้อมูลแบบ H.264 เมฆภาษาไทย/อังกฤษ
- บันทึกความละเอียดสูงสุด 1080N
- Resolution Output 1920x1080P ผ่าน HDMI , VGA , BNC
- Port Audio In 4 , Audio Out 1
- ฟังก์ชัน Switch Mode
- โหมดการบันทึก Manual / Schedule / Motion Detection
- รองรับ Scan QR Code
- รองรับ DDNS Peoplefu เร็ว แรง เสถียร
- รองรับ HDD สูงสุด 6 TB ( 1 SATA )

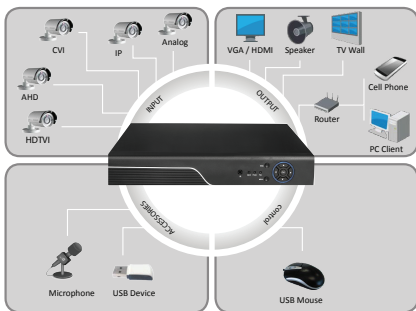

Model	ALL IN ONE Fu 1524 4CH
<b>System</b>	
Main processor	Industrial grade embedded micro controller chip Taiwan Zhiyuan chipset GM8283
Operating system	Embedded LINUX operating system
System resource	Multi-channel real-time recording synchronously, multi-channel real-time playback, multi-channel multi-user network operation, USB back up
<b>Display</b>	
Operation interface	16 bit real color GUI interface support mouse operation
Multilingual Language	YES, 25 kinds of language
Display screen	1/4 screen
<b>Video</b>	
Video Standard	PAL / NTSC (1080N)
Image encode	H.264(Main Profile)
Capture function	YES
Monitor quality	Monitor : D1; VGA & HDMI: (1920*1080,1280*1024,1280*720,1024*768)
Playback quality	1080N/720P
Encode capability	Analogue : 4ch 1080N
Decode capability	4ch 1080N@18fps
Multi-Input (ONVIF 2.8)	Analogue+ Network HD : 1080N (AHD-NH) *2+1080P (network) *2 Network : 4*1080P (network)
<b>Audio</b>	
Audio compression	G.711A
<b>Record and playback</b>	
Record mode	Manual, alarm, motion detection, timing
Local playback	1--4ch (local mode)
Video search	Time, date, event, channel search
<b>Storage and back up</b>	
Space Usage	Video 720P : 10G~42G/day*channel, 1080P : 20G~80G/day*channel, Audio 691.2M/day *channel
Video storage	Local Hard Disk, Network
Back up mode	Network backup, USB portable HDD
<b>Interface</b>	
Video input	4ch BNC(1.0Vp-p,75Ω)
Video output	1ch CVBS, 1ch VGA, 1ch HDMI
Audio input	4ch RCA (200-2800mV,30KΩ)
Audio output	1ch RCA (200-3000mV,5KΩ)/1ch HDMI audio output
Alarm input	No
Alarm output	No
Network port	1*RJ45 10/100 Base-T self-adaptive Ethernet port
PTZ control	1*RS485 port, Support more than 20 kinds protocols.
USB port	Support USB 2.0 port
HDD port	Accommodates 1 SATA HDDs (1 HDD capacity up to 6TB)
Wireless Port	3G & WIFI ( Extended by USB)
<b>User</b>	
User level	Admin / User
User right	Users can set different permissions (How to use please refer to the manual book)
Password protection	YES
<b>Remote</b>	
CMS	CMS Software for multiple DVR (up to 255 DVR simultaneously)
Browser	Internet Explorer, Mozilla Firefox, Google Chrome, Safari
Live Audio	YES
On-line user	Max. 10
<b>Alarm</b>	
Motion detection	16 × 12 grids per channel;6 adjustable parameters for accurate detection (for local analog channel only)
Event Notification	FTP / E-Mail
Pre-alarm Recording	YES
Video loss	Video loss notification
Buzzer	-
<b>Others</b>	
IR remote controller	Remotely control DVR and PTZ cameras via IR transmitter (IR receiver built-in)
Remote control	YES
Cooling fan	NO
Tour	YES
Power Source (±10%)	DC 12V / 2A
Power Consumption (±10%)	<10W (without HDD)
Operating Temperature	0°C ~ +55°C
Dimensions (mm)	250mm(L)* 210mm(W)* 45mm(H)
System Recovery	System auto recovery after power failure